
BPG-2B-505, BIPHASE MODULATORS


TECHNICAL FEATURE

FEATURES

- 10 1000 MHz
- ECL & TTL Compatible
- Fast Switching
- SMD Package



PRINCIPAL SPECIFICATIONS								
Standard	Frequency	Insertion		Amplitude		Phase		Carrier
Model	Range,	Loss, dB,		Balance, dB,		Balance		Suppression
Number	MHz	Max. Typ.		Max. Typ.		Max. Typ.		Typ.
BPG-2B-505	10 – 500	3	2	0.5	0.3	± 3°	± 1°	- 35 dBc
	500 - 1000	4	3	0.75	0.5	± 4°	± 2°	- 30 dBc

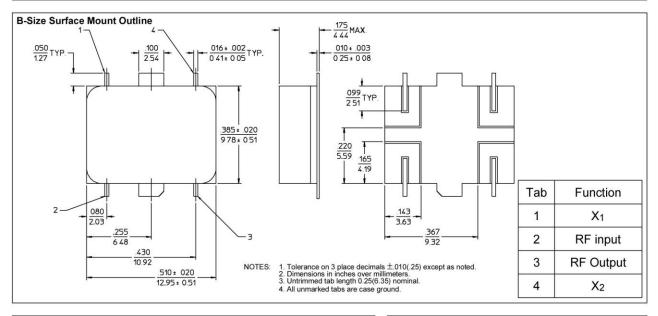

General Notes

- 1. The BPG-2B-505 Biphase Modulator covers the frequency range of 10 to 1000 MHz and is ideal for general applications. Other models available in surface mount packages are electrically similar to the standard flatpack units but have extended frequency range up to 3.6 GHz with proportionately fast risetimes.
- 2. Customized versions are available for special frequency bands matched to your special applications. Most units are available in a variety of alternative packages such as the TO-8, flatpack or connectorized packages. TTL or ECL drivers can be provided in the larger packages.
- 3. Merrimac Biphase Modulators cover a variety of frequency bands while providing wide bandwidths suitable for most applications.
- 4. All units comply with applicable sections MIL-M-28837 and may be supplied screened for compliance with additional specifications for military and space applications requiring the highest reliability.

22Feb9

GENERAL SPECIFICATIONS

Logic 0: - 15 mA

Weight, nominal: 0.1 oz (2.8 g)
Operating Temp: -55° to +85°C

Crane Aerospace & Electronics

Microwave Solutions – Merrimac Industries
41 Fairfield Place, West Caldwell, NJ 07006
+ 1.973.575.1300 ext. 1309 • mw@crane-eg.com

www.craneae.com/mw

