# PDG-02B SERIES - 0° POWER DIVIDERS/COMBINERS

# **TECHNICAL FEATURE**

## **FEATURES**

- 10 to 2000 MHz
- 2-way
- Broadband
- Low Insertion Loss
- Hi-Rel Hermetic Package
- SMD

PRINCIPAL SPECIFICATIONS												
Model Number	Frequency Range, MHz	Frequency Performance, MHz		ation, B, Typ.	Inser Loss, Max.	dB,	Bala	ase ince, Typ.		litude ce, dB, Typ.		WR utput Typ.
PDG-02B-250	10 - 500	10 - 500	25	30	0.7	0.4	2°	1°	0.2	0.1	1.3:1	1.2:1
<sup>†</sup> PDG-02B-255	10 - 500	10 - 500	25	30	0.7	0.4	2°	1°	0.2	0.1	1.3:1	1.2:1
<sup>†</sup> PDG-02B-500	20 - 1000	20 - 500 500 - 1000	20 18	25 20	0.5 1.0	0.3 0.5	2° 3°	1° 2°	0.3 0.3	0.1 0.2	1.4:1 1.6:1	1.3:1 1.3:1
PDG-02B-1000	100 - 2000	100 - 2000	15	20	1.8	1.0	5°	3°	0.5	0.2	1.6:1	1.3:1
<sup>†</sup> PDG-02B-1005	5 100 - 2000	100 - 2000	15	20	1.8	1.0	5°	3°	0.5	0.2	1.6:1	1.3:1
†Unit designed for IR or Vapor Phase Attachment												

#### **General Notes:**


- 1. The PDG-02B series of surface mount two-way Power Dividers/ Combiners, covers a broad frequency range of 10 to 2000 MHz using a special lumped element design to reduce the size while maintaining high performance.
- 2. The surface mount housing has been designed for airborne and space applications where inherent package reliability and hermeticity are critical.

# **GENERAL SPECIFICATIONS**

 $\begin{array}{lll} \mbox{Coupling:} & -3.0 \mbox{ dB nom.} \\ \mbox{Impedance:} & 50 \ \Omega \mbox{ nom.} \\ \mbox{CW Input Power:} & 1 \mbox{ Watt max.} \\ \end{array}$ 

(When used as divider with 1.2:1 VSWRout)

Internal Load Dissipation: 50 mW, Internal Weight, nominal: 0.07 oz. (2 g)
Operating Temperature: -55° to +85°C

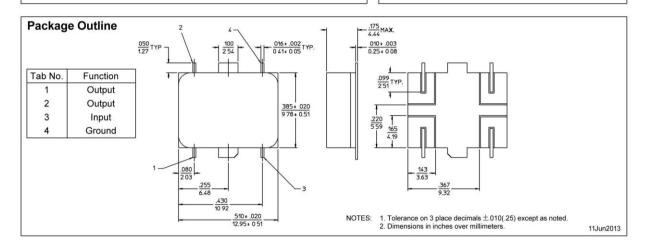

### **Crane Aerospace & Electronics**

Microwave Solutions – Merrimac Industries
41 Fairfield Place, West Caldwell, NJ 07006
+ 1.973.575.1300 ext. 1309 • mw@crane-eg.com

