

QHM-2-12.2G SQ



TECHNICAL FEATURE

FEATURES


- Space Qualified .
- 11.6 12.85 GHz
- SMA Connector

PRINCIPAL SPECIFICATIONS

	Frequency	Isolation	Insertion	Amplitude		Phase			
Model	Range	dB	Loss, dB	Balance dB	VSWR	Balance dB	CW Input	Weight	Operating
Number	GHz	Min.	Max.	Max.	Max.	Max.	Power	Max.	Temperature
QHM-2-12.2G SQ	11.6 - 12.85	23	0.5	0.3	1.20:1	90°±3°	5 W	40 g.	-55° to +85°C

GENERAL NOTES

The QHM-2-12.2G SQ Quadrature Hybrid Power Divider/Combiner covers 11.6 - 12.85 GHz. It uses a stripline design which provides high isolation and low VSWR. This unit has been designed, manufactured, and tested per Merrimac document CENG-0001, "Standard Design Requirements for Space Qualified Devices."

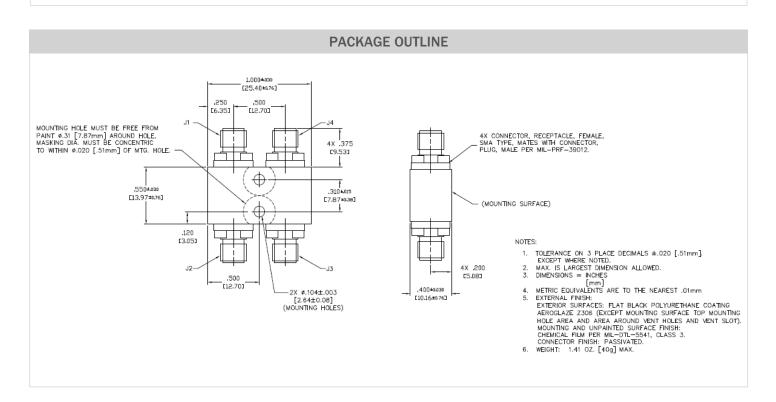

Microwave Solutions

Merrimac Industries 41 Fairfield Place, West Caldwell, NJ 07006

+ 1 973-575-1300, 191309 info@craneae.com www.craneae.com

Page 1 of 1 QHM-2-12.2G SQ Rev. -, 09/27/2027

DS_Divider Combiner_QHM2122GSQ_09272024.indd. This revision all supersedes previous releases All technical information is believed to be accurate, but no responsibility is assumed for errors. We reserve the right to make changes in products or specifications without notice. Copyright © 2024 Crane Electronics, Inc. All rights reserved.